
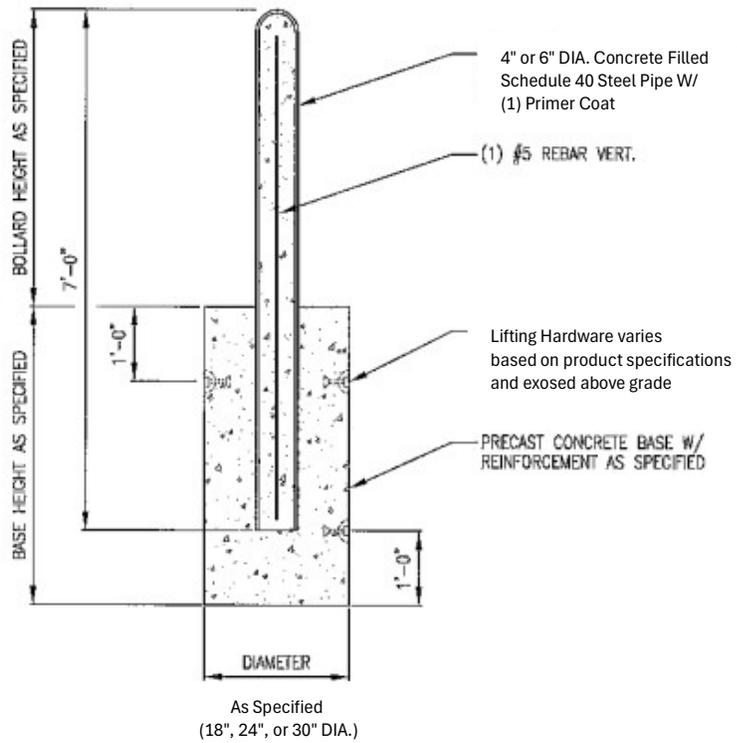


Masters Concrete  
944 Underwood Rd  
Olyphant, PA 18447

### Precast Bollard

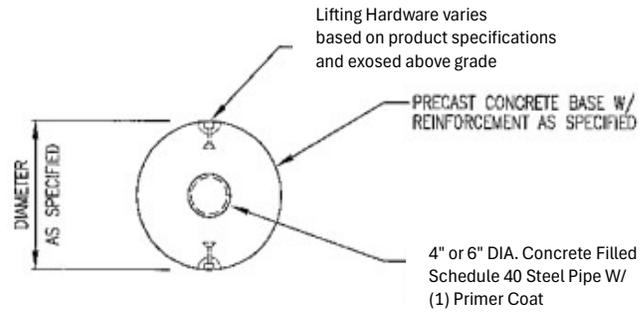

**GENERAL NOTES:**

- CONCRETE TO BE MIN. 4500 PSI @ 28 days
- AIR ENTRAINED 5%-8%
- BASE REINFORCEMENT TO BE AS SPECIFIED BY OTHERS
- BASE SIZE TO BE AS SPECIFIED BY OTHERS
- BOLLARD DIAMETER AND PROJECTION HEIGHT TO BE AS SPECIFIED BY OTHERS

